



INSTRUCTION CARD GARMIN G5

1 STARTING/SWITCH-OFF G5

Master SwitchON
G5 PFD STARTING UP
Avionics SwitchON
G5 HSI STARTING UP

Follow steps in opposite direction for switch-off

2 SETTING QNH/QNE

QNH/QNENOTED FROM ATC
G5 PFD knobTURN TO SET QNH/QNE
Analogue altimeter SET SAME QNH/QNE AS ON G5 + X-CHECK

3 SETTING HEADING BUG/ALTITUDE BUG

G5 HSI/PFD knob PUSH
Heading (HSI)/Altitude (PFD) SELECT
G5 HSI/PFD knob PUSH
G5 HSI/PFD knobTURN TO PREFERRED HEADING/ALTITUDE
G5 HSI/PFD knob PUSH

4 VOR (or LOC)

RADIO 1 PUSH C/N TO TOGGLE BETWEEN COM / NAV
NAV 1 ENTER VOR FREQUENCY
NAV 1PRESS FLIP/FLOP KEY
G5 HSI knob PUSH
G5 HSI knob heading TURN TO PREFERRED COURSE (VOR)
G5 HSI knob PUSH

4 ALTERNATE PFD

G5 HSI knob PUSH
PFD SELECTED
G5 HSI knob PUSH


The HSI now operates as secondary PFD

5 REMARKS

In-flight attitude indicator alignment is not possible
For more information consult the G5/ATO manual or ask the CFI



G5 HSI

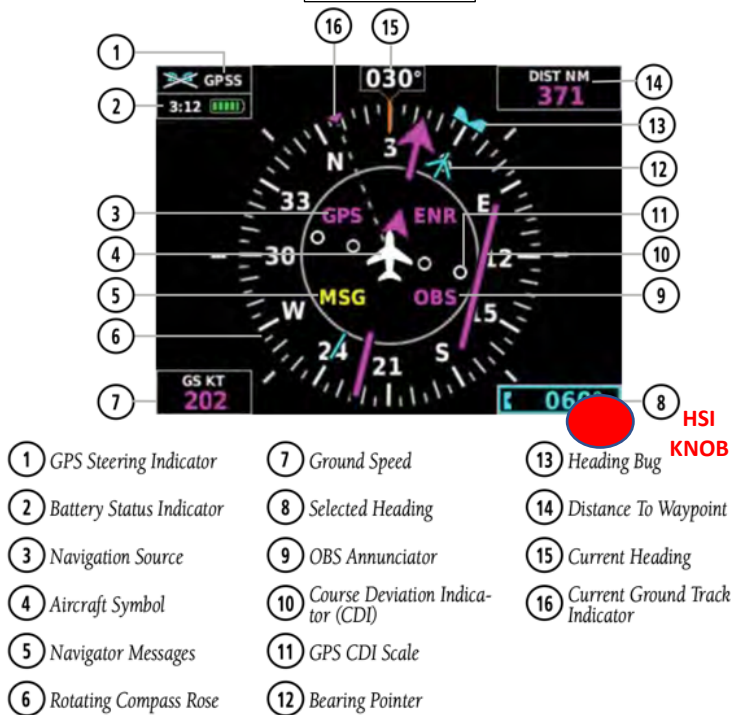

G5 PFD



Figure 2-1 G5 PFD Flight Instruments

PDF KNOB

Top: cockpit PH-DON
Above: G5 HSI overview
Right: G5 PFD overview